

Firefighting Reels



Custom Built Reels

Reelcraft's engineered products group has the capabilities to custom build to your specifications. Our special engineered products are developed for demanding applications in areas such as marine, military, aviation, hydroseeding, sewer and well cleaning, offshore

oil rigs, robotic cable and much more. We offer flexibility, competitive pricing and a lasting commitment to excellence. For more than 20 years, Reelcraft's engineered products group has produced custom products to meet individualized requirements.



Custom built military grade large frame reels
 Photo courtesy of Beta Fluid Systems / A Division of Liquip International

Reelcraft's Capabilities

Few size and weight constraints

We build to meet any extreme size and weight constraints.

Special finishes/paint options

Options include galvanized, CARC paint, marine grade epoxy, liquid enamel coat paint and powder coat paint in any color.

Various drive types

Manual crank, motorized, spring drive, hand-over-hand and more.

Wide range of pressures

A wide variety of pressure ranges available from 50 to 15,000 PSI and beyond.

Unique options

Hose Boss rewind assist, tensioning bars, multiple fluid paths, level rewinds and much more.


No minimum quantities

Order from 1 to as many as you need.



Firefighting Hose Reels ▲

Custom engineered and built Series 2400 electric motor rewind hose reel.

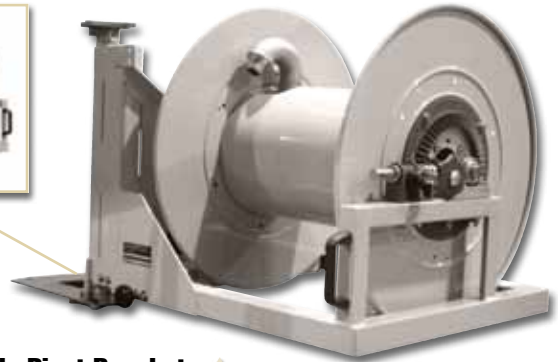

Hose Reels Pivot Brackets ▲

Bracket is attached to the side of the reel frame. The reel pivots on the bracket with positive stops at 0°, 45° and 90° locations.



Marine grade epoxy



Aviation



Fuel delivery



Stainless steel



Hydroseed



Fiber optic cable



Sewer/jetter

Large Frame Hose Reels

Nordic Heavy Duty Solutions

Reelcraft's Engineered Product Solutions

Full Flow Design

The goose neck is contoured to match the drum diameter, which allows smooth hose wrapping and unimpeded flow.

Long Service Life

Swivel incorporates a permanently lubricated ball bearing.

Adjustable Hose Tension

The brake can be adjusted to suit the application requirements.

Trouble-Free Rewinding

Chain and sprocket drive ensures smooth and consistent operation.

Meets or Exceeds Military Vibration for Truck Transport test.

MIL-STD-810F
500,000 mile equivalent

Long Service Life

The spool axial is supported by independent self-aligning bearing.

Free Rotation While Pressurized


The swing joint and spindle allows reel to freely rotate while fluid is pressurized.

Precise Rigid Construction

Proprietary unitized tie rods are zinc plated offering greater strength and resistance to vibration and corrosion.

Ultimate Corrosion Resistance

Individually powder coated components insure maximum coverage and resistance to corrosion. Stainless steel fasteners are standard.

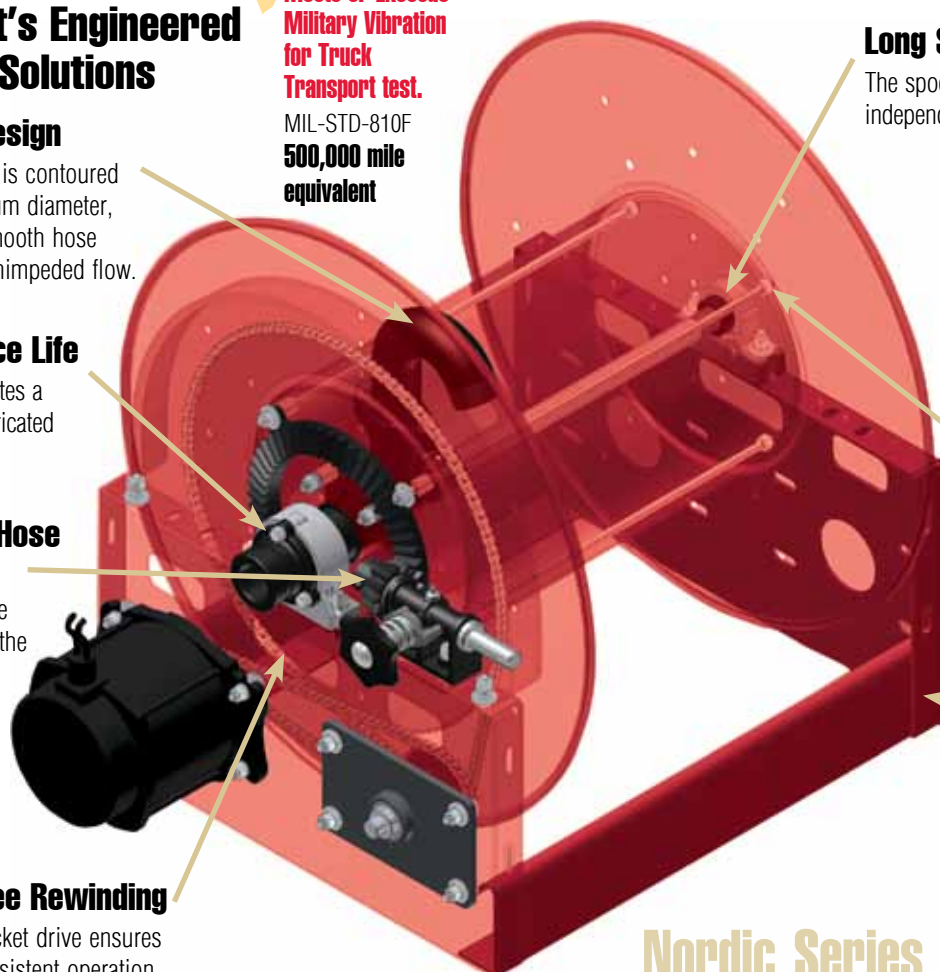

Nordic Series

Drive Options	Series	Head Dia.	Drum Length	Thread Size	Inlet/Outlet Thread	Thread Style	Fluid Path Material	Pressure	Inlet Style	Fluid Path Location/Direction	Color Code
E	12 V DC	1200	19	50 1/2"	FM	NP NPT	A Aluminum	LP 0-600	1 Straight	1 Left Hand Top Wind	R Red
NJ	24 V DC	2400	21	75 3/4"	FM	BP BSPP	D Ductile Iron	1K 600-1000	2 90°	2 Left Hand Bottom Wind	B Black
EP	*12 V DC Exp	3900	23	10 1"	FF	BT BSPT	S Stainless	3K 1000-3000	5 1" LPG	3 Right Hand Top Wind	W White
EA	*115 V AC Exp	3700	25	12 1 1/4"	MF		B Bronze	5K 3001-5000	6 1 1/2" LPG	4 Right Hand Bottom Wind	G Grey
EX	*230 V AC Exp	5900	28	15 1 1/2"	MF			6K 5001-6000			S Silver
EJ	*24 V DC Exp		31	20 2"	MM			10K 10,000			
HD	Hydraulic		36	25 2 1/2"	VM			15K 15,000			
AF	1 1/2 HP Air		39	30 3"	VM						
AR	4 HP Air		46	40 4"	VF						
BC	Bevel Crank										
HC	Hand Crank										
S	Storage										
CR	Cable Reel										

Material Options/ Drive Size
1/2" Pitch Chain ###5
5/8" Pitch Chain ###6
3/4" Pitch Chain ###7
Gear Driven ###9
Alum. Frame/Spool ##5#
304 S.S. Frame/Spool ##9#
316 S.S. Frame/Spool ##8#
Sewer Cleaning Reel ##15
Twin Hose ####T

Additional Options
Idler
Chain Guard
Roller Bracket (Top)
Roller Bracket (Bottom)
Inboard Motor
Brake
Auxiliary Bevel Crank
Hose Boss (Guide)
Junction Box
Explosion Proof Switch
Solenoid
Circuit Breaker
Control Valve

Part No. Example: EP3900-23-28-15FFNPALP21-R00
 EP(12VDC Electric Explosion Proof Motor)
 3900(Series 3900 Hose Reel)
 -23(23" Head Dia.) -28(28" Drum Length)
 -15(1-1/2" Thread Size) FF(Female In/Out Thread Type)
 NP(NPT Thread Style) A(Aluminum Fluid Path)
 LP(0-600 PSI) 2(90° Inlet)
 1(Left Hand Top Wind Fluid Path Location/Direction)
 R(Red)

NOTE: Not all options available in every combination. Actual assigned part numbers will vary. Please contact manufacturer for price and availability.



Hand Crank
CA32112 L


Heavy Duty Hand Crank and Motor Driven Reels



Series 30000 - Air/Water/Oil - 1/4", 1/2", 3/4", 1" I.D.

Reelcraft's Series 30000 reels are designed for rugged, heavy duty applications requiring long lengths of hose and large storage capacity. All-bolted unitized construction with no welds to fatigue, full flow swivel and heavy gauge steel frame, spool and drum ensure longest service life. Series 30000's vibration-proof, self-locking fasteners are ideal for industrial or field use such as turf care or pest control.

Note: Weights listed are for crank driven - Add for power driven, electric - all explosion proof 45 lb. (20.41 kg); 12 Volt D.C. 1/3 H.P. 30 lb. (13.61 kg); Air 6 AM 36 lb. (16.33 kg). * Note: capacity chart is reference only. For all metric thread connections over 1/2" add the suffix number 70 to indicate BSPT threads - example CA33112 M70.

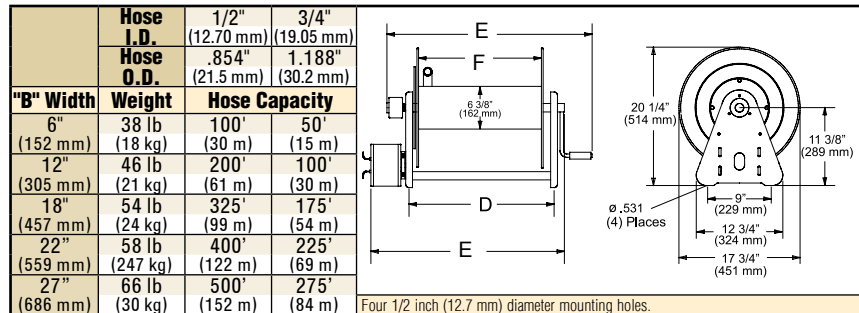

Model without hose & bumper	Shipping Weight		Pressure		Hose I.D.		Hose O.D.		(F)NPTF Reel Outlet	(F)NPTF Reel Inlet	Capacity		D		E		F	
	lbs	kg	psi	bar	in	mm	in	mm	in	in	ft	m	in	mm	in	mm	in	mm
Hand Crank Hose Reels Temperature operating range from -20 °F (-29 °C) to +250 °F (121 °C)																		
CA32106 L	40	18	1000	69	1/2	13	.750	19	1/2	1/2	100	30	9 ³ / ₄	248	19 ³ / ₄	498	6	152
CA32112 L	46	21	1000	69	1/2	13	.750	19	1/2	1/2	200	61	15 ³ / ₄	400	25 ³ / ₄	654	12	305
CA32118 L	51	23	1000	69	1/2	13	.750	19	1/2	1/2	325	99	21 ³ / ₄	552	31 ³ / ₄	806	18	457
CA32122 L	65	29	1000	69	1/2	13	.750	19	1/2	1/2	400	122	25 ³ / ₄	654	35 ³ / ₄	908	22	559
CA32128 L	69	31	1000	69	1/2	13	.750	19	1/2	1/2	500	152	30 ³ / ₄	781	40 ³ / ₄	1035	27	686
CA32106 M	42	19	3000	207	1/2	13	.850	22	1/2	1/2	100	30	9 ³ / ₄	248	19 ³ / ₄	498	6	152
CA32112 M	46	21	3000	207	1/2	13	.850	22	1/2	1/2	200	61	15 ³ / ₄	400	25 ³ / ₄	654	12	305
CA33106 L	41	19	1000	69	3/4	19	1.075	27	3/4	3/4	50	15	9 ³ / ₄	248	19 ³ / ₄	498	6	152
CA33112 L	46	21	1000	69	3/4	19	1.075	27	3/4	3/4	100	30	15 ³ / ₄	400	25 ³ / ₄	654	12	305
CA33118 L	51	23	1000	69	3/4	19	1.075	27	3/4	3/4	175	53	21 ³ / ₄	552	31 ³ / ₄	806	18	457
CA33112 M	47	21	3000	207	3/4	19	1.188	30	3/4	3/4	100	30	15 ³ / ₄	400	25 ³ / ₄	654	12	305
CA33118 M	51	23	3000	207	3/4	19	1.188	30	3/4	3/4	175	53	21 ³ / ₄	552	31 ³ / ₄	806	18	457
Electric Motor Driven Hose Reels Temperature operating range from -20 °F (-29 °C) to +250 °F (121 °C)																		
EA32118 L12D	68	31	1000	69	1/2	13	.845	21	1/2	1/2	325	99	21 ³ / ₄	552	29 ⁵ / ₈	752	18	457
EA33112 L12D	68	31	1000	69	3/4	19	1.188	30	3/4	3/4	100	30	15 ³ / ₄	400	23 ⁷ / ₈	606	12	305

All Series 30000 reels are supplied without hose. Assemblies quoted upon request. **CAUTION:** To prevent drum damage, fully extend and pressurize hose and rewind on the reel. **NOTE:** Many more reel models available in addition to chart. Please call manufacturer for details on models not listed.

- ✓ Adjustable spool rotation drag that eliminates hose backlash
- ✓ Nickel-plated swivel with four O-ring options: AFLAS (standard), Buna, Viton® or -EPR* seals
*Standard swivel
- ✓ All bolted construction - no welds
- ✓ Motor mounting at either end of reel
- ✓ Ball bearing swivel (excludes 1/2" low pressure models)
- ✓ Permanently lubricated dual main bearings
- ✓ Optional lock pin to prevent spool rotation when the reel is not in use, part #S600874
- ✓ Full flow shaft

Hose Installation: The Series 30000 gooseneck is easily removed from the reel for hose attachment. Simply remove the four fasteners attaching gooseneck to reel, connect hose to the gooseneck and re-connect to the reel. **NOTE:** Do not discard the O-ring; insure that the O-ring is properly fitted into the grooves when replacing the gooseneck.



Heavy Duty Large Frame Reels Nordic Series 1200

1" fluid path for 1/2" through 1" I.D. hose

Rewind: Direct crank rewind or chain and sprocket drive powered by A.C. or D.C. electric motor, compressed air motor or hydraulic motor. Crank is not supplied on power rewind models. A pin lock assembly is optional on manual rewind reels. A 3/8" pitch chain is standard.

Inlet: 1/2" up to 1" female/male NPT 90° swivel joint. Straight swivel joint may be specified at extra cost.

Gooseneck: 1/2", 3/4", 1" female NPT. Other sizes and/or threads, including garden hose thread, can be furnished when specified.

The standard color for this series is red.

Built to order, not returnable.




Nordic Series 1200

Shown with optional three-way roller bracket.

Nonexplosion-proof motor is standard "E" (pictured). Explosion proof (EP) motor is available upon request.



Product temperatures range from -20 °F to +225 °F and standard pressures to 3000 psi. Other temperatures or pressures can be furnished at extra cost; consult manufacturer.

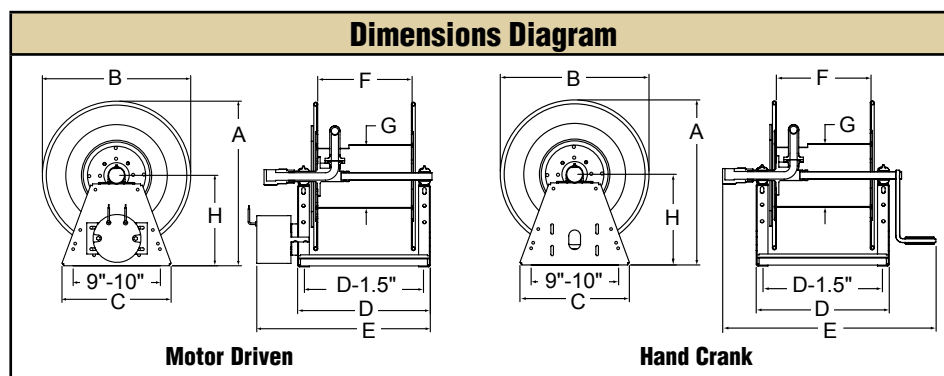

Specification - Hose Capacity and Reel Dimensions																				
Hose I.D.	in	1/2	3/4	1	KEY: CRK = hand crank; "E" = nonexplosion-proof electric motor; EP = explosion-proof motor; AIR = air motor; BEVEL = bevel crank															
Hose O.D.	in	0.845	1.18	1.4																
	mm	21.5	30	35.6																
Model	Hose Length			Weight Crank*	Weight Motor*	Weight Bevel*	A	B	C	D	E CRK	E "E"	E EP	E AIR	E BEVEL	F	G	H		
1200-19-6	ft	100	50	35	41 LB	58 LB	48 LB	in	21.1	19	14	11	22	16.5	16	24	6	8	11.6	
	m	30	15	11	19 KG	26 KG	22 KG	mm	536	483	356	279	559	419	470	610	152	203	295	
1200-19-12	ft	200	100	70	43 LB	60 LB	50 LB	in	21.1	19	14	17	28	22.5	24.5	22	30	12	8	11.6
	m	61	30	21	20 KG	27 KG	23 KG	mm	536	483	356	432	711	572	622	559	762	305	203	295
1200-19-18	ft	300	150	105	44 LB	61 LB	51 LB	in	21.1	19	14	23	34	28.5	30.5	28	36	18	8	11.6
	m	91	46	32	20 KG	28 KG	23 KG	mm	536	483	356	584	864	724	775	711	914	457	203	295
1200-19-22	ft	365	180	125	45 LB	62 LB	52 LB	in	21.1	19	14	27	38	32.5	34.5	32	40	22	8	11.6
	m	111	55	38	20 KG	28 KG	24 KG	mm	536	483	356	686	965	826	876	813	1016	559	203	295
1200-19-28	ft	465	230	160	46 LB	63 LB	53 LB	in	21.1	19	14	33	44	38.5	40.5	38	46	28	8	11.6
	m	142	70	49	21 KG	29 KG	24 KG	mm	536	483	356	838	1118	978	1029	965	1168	711	203	295
1200-23-6	ft	150	75	50	49 LB	66 LB	56 LB	in	25.1	23	15.25	11	22	16.5	18.5	16	24	6	11.25	13.6
	m	46	23	15	22 KG	30 KG	25 KG	mm	638	584	387	279	559	419	470	406	610	152	286	345
1200-23-12	ft	300	150	100	51 LB	68 LB	58 LB	in	25.1	23	15.25	17	28	22.5	24.5	22	30	12	11.25	13.6
	m	91	46	30	23 KG	31 KG	26 KG	mm	638	584	387	432	711	572	622	559	762	305	286	345
1200-23-18	ft	450	225	150	52 LB	69 LB	59 LB	in	25.1	23	15.25	23	34	28.5	30.5	28	36	18	11.25	13.6
	m	137	69	46	24 KG	31 KG	27 KG	mm	638	584	387	584	864	724	775	711	914	457	286	345
1200-23-22	ft	550	275	180	53 LB	70 LB	60 LB	in	25.1	23	15.25	27	38	32.5	34.5	32	40	22	11.25	13.6
	m	168	84	55	24 KG	32 KG	27 KG	mm	638	584	387	686	965	826	876	813	1016	559	286	345
1200-23-28	ft	700	350	230	54 LB	71 LB	61 LB	in	25.1	23	15.25	33	44	38.5	40.5	38	46	28	11.25	13.6
	m	213	107	70	24 KG	32 KG	28 KG	mm	638	584	387	838	1118	978	1029	965	1168	711	286	345

Refer to page 3 to build a representative model number. Final part number assigned upon quote. *Estimated weight on carbon steel frame.

Heavy Duty Large Frame Reels Nordic Series 2400

1/2", 3/4" or 1" fluid path for 1/2" through 1" I.D. hose

Rewind: Gear-drive rewind (new) or chain and sprocket drive powered by A.C. or D.C. electric motor, compressed air motor or hydraulic motor.

Inlet: 1/2" up to 1" female/male NPT 90° swivel joint. Straight swivel joint may be specified at extra cost.

Gooseneck: 1/2" up to 1" female/male NPT. Other sizes and/or threads, including male NST and male garden hose thread, can be furnished when specified.

Product temperatures from -20 °F to +225 °F and standard pressures to 3000 psi. Reels to operate at other temperatures or pressures can be furnished at extra cost, consult manufacturer. The standard color for this series is red or gray. Add 12" to B dimension when crank is in rewind position.


NEW!
 Gear drive
 option



**1/2" pitch chain
 now standard**

Shown with optional
 bevel crank.


Made in USA

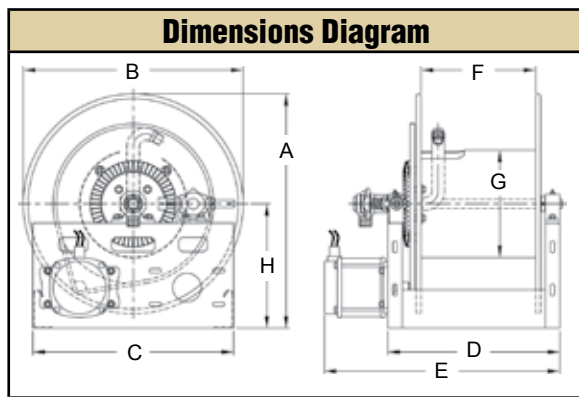

Fire Service / Booster Reels

The **aluminum Series 2450** reel for booster hose is corrosion-resistant and weighs up to 50% less than standard steel booster reels. Features include an aluminum spool and frame assembly, plated steel fluid path and plated sprocket and fasteners. **No painting or finishing is required.**

Built to order, not returnable.

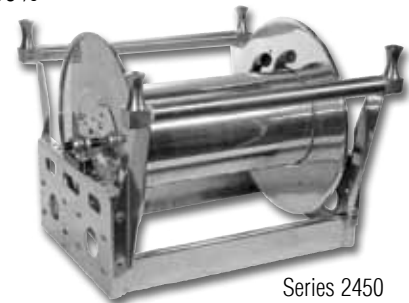

Series 2450

Hose I.D.	in mm	1/2	3/4	1	Specification - Hose Capacity and Reel Dimensions																		
		13 19	19 25	25 32	KEY: CRK = hand crank; ELC = electric motor; HYD = hydraulic motor; AIR = air motor																		
Hose O.D.	in mm	22	33	40	Model	Hose Length (other std. lengths available)			Est. Weight	A	B CRK	B ELC	B AIR	B HYD	C	D	E CRK	E ELC	E AIR	E HYD	F	G	H
2400-19-16	ft	200	100	50	70 LB	in	22.5	21	21	21	21	21	21	21	22	26	29	28	28	16	11.25	13	
	m	61	30	15	32 KG	mm	572	533	533	533	533	533	533	533	559	660	737	711	711	406	286	330	
2400-23-14	ft	315	150	100	74 LB	in	24.5	23	23	23	23	23	21	20	24	27	26	26	14	11.25	13		
	m	96	46	30	34 KG	mm	622	584	584	584	584	533	508	610	686	660	660	660	356	286	330		
2400-23-18	ft	485	240	150	78 LB	in	24.5	23	23	23	23	23	21	24	28	31	30	30	18	11.25	13		
	m	148	73	46	35 KG	mm	622	584	584	584	584	533	610	711	787	762	762	762	457	286	330		
2400-23-20	ft	535	260	165	80 LB	in	24.5	23	23	23	23	21	26	30	33	32	32	20	11.25	13			
	m	163	79	50	36 KG	mm	622	584	584	584	533	660	762	838	813	813	813	508	286	330			
2400-23-24	ft	625	300	200	84 LB	in	24.5	23	23	23	23	21	30	34	37	36	36	24	11.25	13			
	m	191	91	61	38 KG	mm	622	584	584	584	533	762	864	940	914	914	914	610	286	330			
2400-25-8	ft	235	125	60	72 LB	in	26.5	25	25	25	25	21	14	18	21	20	20	8	11.25	14			
	m	72	38	18	33 KG	mm	673	635	635	635	635	533	356	457	533	508	508	203	286	356			
2400-25-14	ft	450	225	110	74 LB	in	26.5	25	25	25	25	21	20	24	27	26	26	14	11.25	14			
	m	137	69	34	34 KG	mm	673	635	635	635	635	533	308	610	686	660	660	356	286	356			
2400-31-8	ft	435	185	125	74 LB	in	32.5	31	31	31	31	24	14	18	21	20	20	8	11.25	17			
	m	133	56	38	34 KG	mm	826	787	787	787	787	610	356	457	533	508	508	203	286	432			
2400-31-10	ft	540	235	165	76 LB	in	32.5	31	31	31	31	24	16	20	23	22	22	10	11.25	17			
	m	165	72	50	34 KG	mm	826	787	787	787	787	610	406	508	584	559	559	254	286	432			
2400-31-16	ft	900	400	300	80 LB	in	32.5	31	31	31	31	24	22	26	29	28	28	16	11.25	17			
	m	274	122	91	36 KG	mm	826	787	787	787	787	610	559	660	737	711	711	406	286	432			

Refer to page 3 to build a representative model number. Final part number assigned upon quote. Refer to chart on page 7 for weight adders.

Heavy Duty Large Frame Reels Nordic Series 3900

1 1/2" fluid path for 1" through 1 1/2" I.D. hose

Rewind: Gear-drive rewind (new) or chain and sprocket drive powered by A.C. or D.C. electric motor, compressed air motor or hydraulic motor.

Inlet: 2" straight grooved fitting with 1 1/2" female NPT straight swivel joint is standard. 2" 90° grooved fitting with 1 1/2" NPT female available at extra cost.

Gooseneck: 1", 1 1/4" and 1 1/2" female/male NPT outlet. Other sizes and/or threads can be furnished and must be specified.

Add 12" to B dimension when crank is in rewind position. The standard color for this series is red or gray.

Built to order, not returnable.

NEW!
Gear drive
option


1/2" pitch chain
now standard

Shown with optional
bevel crank.

Made in USA 



Standard seals maximum temperature 174 °F (79 °C) and minimum temperature -20 °F (-29 °C). Extreme temperature seals maximum temperature 400 °F (204 °C) and minimum temperature -50 °F (-45 °C) and standard pressures to 600 psi. Other temperatures or pressures can be furnished at extra cost, consult manufacturer.

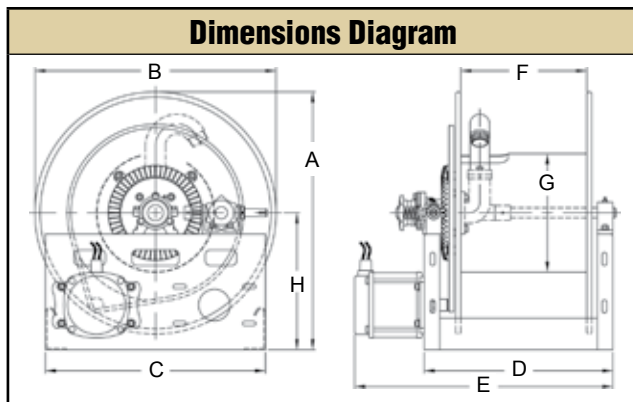

Note: Weights shown in chart are for crank rewind models.

Prefix	Type	LB / KG
EP	Electric	42 / 19
A	Air	26 / 12
H	Hyd	26 / 12

Add these amounts and model number prefix for power rewind models.

Hose I.D.	in mm	1	1 1/4	1 3/8	1 1/2	Specification - Hose Capacity and Reel Dimensions																			
		25 32	32 46	35 51	38 52	KEY: CRK = hand crank; ELC = electric motor; HYD = hydraulic motor; AIR = air motor																			
Hose O.D.	in mm	1.563 40	1.813 46	2.000 51	2.063 52	Model	Hose Length				Est. Weight	A	B CRK	B ELC	B AIR	B HYD	C	D	E CRK	E ELC	E AIR	E HYD	F	G	H
3900-19-16	ft	55	45	45	40	90 LB	in	22.5	21	21	21	21	21	21	21	22	26	29	28	28	16	11.25	13		
	m	17	14	14	12	41 KG	mm	572	533	533	533	533	533	533	533	559	660	737	711	711	406	286	330		
3900-19-20	ft	70	65	60	55	93 LB	in	22.5	21	21	21	21	21	21	21	26	30	33	32	32	20	11.25	13		
	m	21	20	18	17	42 KG	mm	572	533	533	533	533	533	533	533	660	762	838	813	813	508	286	330		
3900-23-12	ft	95	60	55	50	87 LB	in	24.5	23	23	23	23	21	18	22	25	24	24	24	12	11.25	13			
	m	29	18	17	15	39 KG	mm	622	584	584	584	584	533	457	559	635	610	610	610	305	286	330			
3900-23-18	ft	155	90	90	80	93 LB	in	24.5	23	23	23	23	21	24	28	31	30	30	18	11.25	13				
	m	47	27	27	24	42 KG	mm	622	584	584	584	584	533	610	711	787	762	762	457	286	330				
3900-23-20	ft	165	105	100	95	95 LB	in	24.5	23	23	23	23	21	26	30	33	32	32	20	11.25	13				
	m	50	32	30	29	42 KG	mm	622	584	584	584	584	533	660	762	838	813	813	508	286	330				
3900-23-26	ft	220	120	110	105	100 LB	in	24.5	23	23	23	23	21	32	36	39	38	38	26	11.25	13				
	m	67	37	34	32	45 KG	mm	622	584	584	584	584	533	813	914	991	965	965	660	286	330				
3900-23-28	ft	240	145	140	135	103 LB	in	24.5	23	23	23	23	21	34	38	41	40	40	28	11.25	13				
	m	73	44	43	41	47 KG	mm	622	584	584	584	584	533	864	965	1041	1016	1016	711	286	330				
3900-23-36	ft	320	190	180	175	111 LB	in	24.5	23	23	23	23	21	42	46	49	48	48	36	11.25	13				
	m	98	58	55	53	50 KG	mm	622	584	584	584	584	533	1067	1168	1245	1219	1219	914	286	330				
3900-25-12	ft	95	85	55	50	89 LB	in	26.5	25	25	25	25	21	18	22	25	24	24	12	11.25	14				
	m	29	26	17	15	40 KG	mm	673	635	635	635	635	533	457	559	635	610	610	305	286	356				
3900-25-20	ft	165	155	100	95	97 LB	in	26.5	25	25	25	25	21	26	30	33	32	32	20	11.25	14				
	m	50	47	30	29	44 KG	mm	673	635	635	635	635	533	660	762	838	813	813	508	286	356				
3900-31-12	ft	210	155	115	105	92 LB	in	32.5	31	31	31	31	24	18	22	25	24	24	12	11.25	17				
	m	64	47	35	32	42 KG	mm	826	787	787	787	787	610	457	559	635	610	610	305	286	432				
3900-31-16	ft	305	205	155	150	96 LB	in	32.5	31	31	31	31	24	22	26	29	28	28	16	11.25	17				
	m	93	62	47	46	44 KG	mm	826	787	787	787	787	610	559	660	737	711	711	406	286	432				
3900-31-20	ft	365	275	200	190	100 LB	in	32.5	31	31	31	31	24	26	30	33	32	32	20	11.25	17				
	m	111	84	61	58	45 KG	mm	826	787	787	787	787	610	660	762	838	813	813	508	286	432				

Refer to page 3 to build a representative model number. Final part number assigned upon quote.

North America and Corporate Headquarters

2842 E. Business Hwy 30
Columbia City, IN 46725

Customer Service: 855-634-9109
Ph: 800-444-3134 • Fax: 800-444-4587
Ph: 260-248-8188 • Fax: 260-248-2605
reelcraft@reelcraft.com
www.reelcraft.com

Latin America and the Middle East

Thompson International, Inc.
P.O. Box 12958, Ft. Wayne, IN 46866
Ph: 260-489-1685 • Fax: 260-489-0203
info@t-i-i.com
www.reelcraft.com/latinamerica

China

Reelcraft Changzhou Co., Ltd.
Building C, No. 229 HeHai West Road
Changzhou, Jiangsu, China 213022
Ph: +86 (519) 8512 2391 ext. 8002
Fax: +86 (519) 8512 9309
rco@reelcraftchina.com
www.reelcraftchina.com

Europe

Unit 17 • Cronin Courtyard
Weldon South Industrial Estate
Corby • Northamptonshire NN18 8AG United Kingdom
Ph: +44 (0) 1536 406999
Fax: +44 (0) 1536 406777
europe@reelcraft.com
www.reelcraft.com/europe

Pacific Rim

P.O. Box 53776, Clark Freeport Zone
Philippines 2023
Ph: +63 (45) 625-6624
Fax: +63 (45) 321-0643
rap@comclark.com
www.reelcraft.com/asia

Australia

PO Box 6463 BC, Blacktown
NSW 2148, Australia
Ph: +61 (2) 9621 8988
Fax: +61 (2) 9621 7688
sales@recoila.com
www.reelcraft.com