

# Welding Reels

Hose  
Reels



Cable  
Reels



[reelcraft.com](http://reelcraft.com)

McGUIRE AIR COMPRESSORS



**REELCRAFT**<sup>®</sup>

1-888-229-9999



# 5 reasons why hose reels increase productivity



**Improve efficiency**  
Hoses, cable and cords are where you want/need them.



**Increase safety**  
Reduce tripping accidents and lost work time.



**Minimize leakages**  
Reduce costs of air and water leakages.



**Reduce hose wear**  
Hose and cords on reels can last up to five times longer.



**Increase productivity**  
No more tangled hoses improves efficiency.

# Reelcraft: Better by Design

## Vulcanized Double Line Hoses

Grade RM: Non-oil resisting rubber tube with a flame and oil resisting rubber cover (acetylene only)  
Grade T: Flame and oil resistant tube and cover for use with all fuel gases.

## Reinforced Steel

The steel-stamped guide arm is reinforced to reduce bending due to angular pull.

## Corrosion-Resistant


Steel components are individually powder coated to virtually eliminate corrosion.

## Trouble-Free Performance

Fewer components increase the service life of the reel and improve performance.

## Finish with Quality

Our components undergo a special five-stage cleaning process and are individually powder-coated for the highest quality paint adhesion. Excess powder is reclaimed to be environmentally friendly.

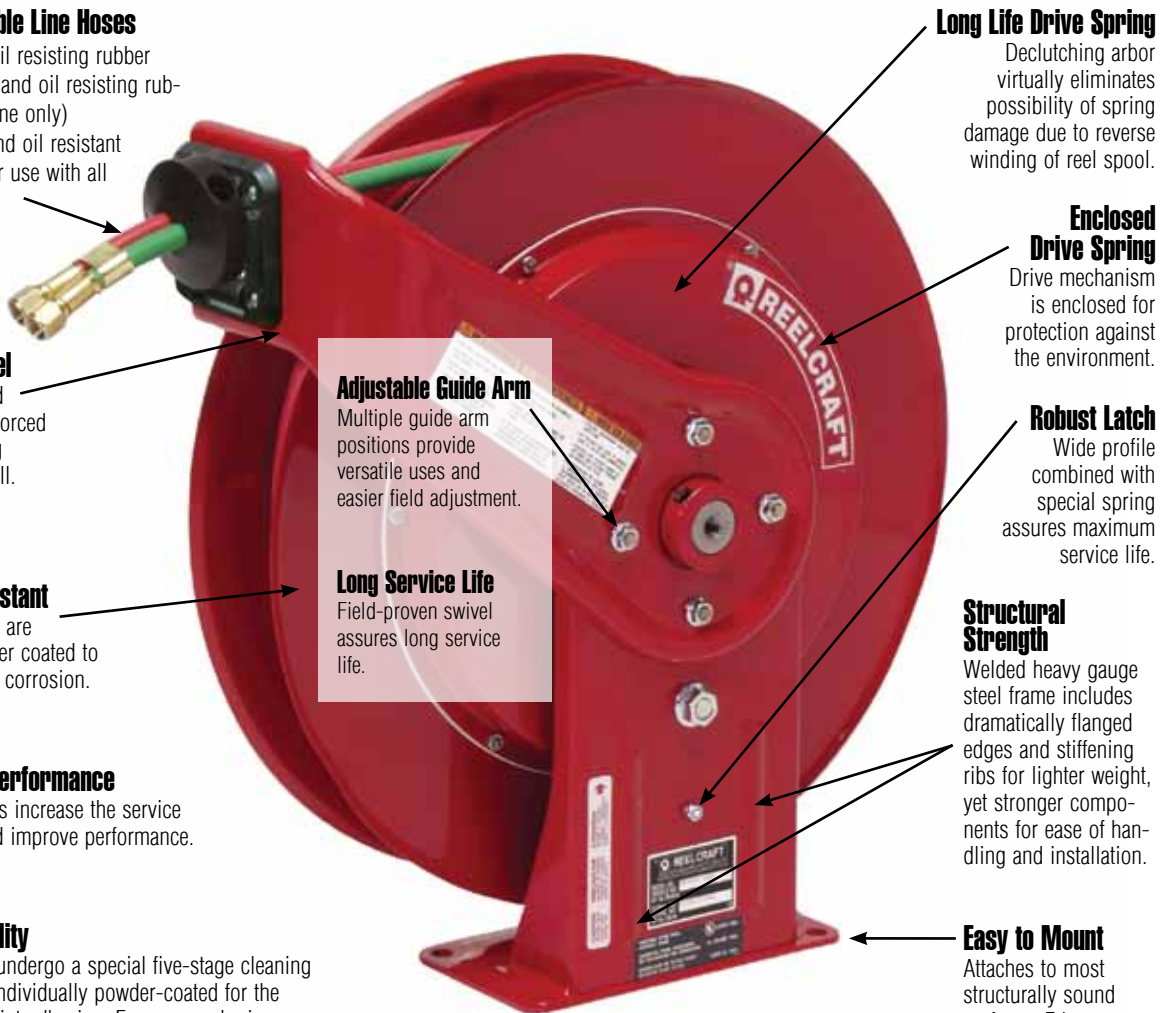

## Long Life Drive Spring

Declutching arbor virtually eliminates possibility of spring damage due to reverse winding of reel spool.

## Enclosed Drive Spring

Drive mechanism is enclosed for protection against the environment.

## Robust Latch

Wide profile combined with special spring assures maximum service life.

## Structural Strength

Welded heavy gauge steel frame includes dramatically flanged edges and stiffening ribs for lighter weight, yet stronger components for ease of handling and installation.

## Easy to Mount

Attaches to most structurally sound surfaces. Edges are curved for safety.

## Adjustable Guide Arm

Multiple guide arm positions provide versatile uses and easier field adjustment.

## Long Service Life

Field-proven swivel assures long service life.

Shown: TW7450 OLP



STW3450 OLP


Series S reels are made in Australia.



TW7450 OLP



Made in USA

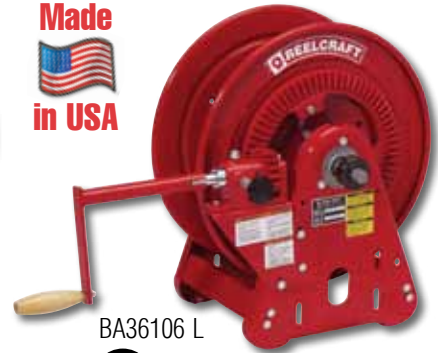

BA36106 L



Diagram	Series 5000 / 7000 / 80000					
	1		2		3	
	in	mm	in	mm	in	mm
A	14 1/2	368	20 1/4	514	25 3/8	645
B	13 3/4	349	19 3/4	502	24	610
C	9 3/4	348	7 7/8	200	10	254
D	2 1/2	64	3 7/8	98	6	152
E	6	152	7 3/8	187	12 1/4	311

Series 5000 reels have four 5/16" (8 mm) diameter mounting holes.

Diagram	Series 30000			
	4		5	
	in	mm	in	mm
A	15 5/8	397	21 5/8	550
B	6	152	12	305
C	9 3/4	248	15 3/4	400
D	11	280	17	432

Four 1/2" (12.7 mm) mounting holes. Overall length with crank handle removed is 17 3/4" (451 mm).

Model with Hose	Shipping Weight		Pressure		Hose I.D.		Hose O.D.		Hose Outlet	Reel Inlet	Hose Length		Model without hose & bumper	Shipping Weight		Size Index No.
	lbs	kg	psi	bar	in	mm	in	mm			ft	m		lbs	kg	
<b>Oxygen / Acetylene Hose Reels</b>																
CA TW5425 OLP	26	12	200	14	1/4	6	.530	13	9/16 - 18(F)	1/4 NPT(F)	25	8	TW5400 OLP	21	10	1
IN STW3450 OLP	29	13	300	21	1/4	6	.530	13	9/16 - 18(F)	9/16 - 18(M)	50	15	-----	-----	-----	See Reel Catalog
CA TW7450 OLP	50	23	200	14	1/4	6	.530	13	9/16 - 18(F)	1/4 NPT(F)	50	15	TW7400 OLP	42	19	2
CA TW7460 OLP	55	25	200	14	1/4	6	.530	13	9/16 - 18(F)	1/4 NPT(F)	60	18	TW7400 OLP	42	19	2
Series 30000 Hand Crank					1/4	6	.530	13	9/16 - 18(M)	9/16 - 18(M)	125	38	BA36106 L	50	23	4
Series 30000 Hand Crank					1/4	6	.530	13	9/16 - 18(M)	9/16 - 18(M)	250	76	BA36112 L	57	26	5

<b>Welding Gas (T-Grade) Hose Reels</b>																
IN TW5425 OLPT	26	12	200	14	1/4	6	.530	13	9/16 - 18(F)	1/4 NPT(F)	25	8	TW5400 OLPT	22	10	1
IN TW7450 OLPT	50	23	200	14	1/4	6	.530	13	9/16 - 18(F)	1/4 NPT(F)	50	15	TW7400 OLPT	43	20	2
TW7460 OLPT	55	25	200	14	1/4	6	.530	13	9/16 - 18(F)	1/4 NPT(F)	60	18	TW7400 OLPT	43	20	2
CA TW84100 OLPT	101	46	200	14	1/4	6	.530	13	9/16 - 18(M)	9/16 - 18(M)	100	30	TW84000 OLPT	81	37	3
TW86075 OLPT	99	45	200	14	3/8	10	.625	16	9/16 - 18(M)	9/16 - 18(M)	75	23	TW86000 OLPT	86	39	3

Acetylene and fuel gas (red) inlet 1/4" FPT / oxygen (green) inlet 1/4" FPT. 9/16-18 models above are B size. Acetylene/fuel gas side has a LH thread and the oxygen side has a RH thread. Models supplied less hose have male outlets.

Hose Inlet Connecting Fittings - Optional		
Model No.	Inlet Connection Fittings	
90°	S300090	ACETYLENE B size 9/16 - 18 LH (M) x 1/4" NPT (M)
	S300091	OXYGEN B size 9/16 - 18 RH (M) x 1/4" NPT (M)
Straight	261371	OXYGEN B size 9/16 - 18 RH (M) x 3/8" NPT (M)
	261372	ACETYLENE/fuel gas - B size 9/16 - 18 LH (M) x 3/8" NPT (M)

Hose supplied on oxygen/acetylene reels is twin-Siamese type meeting R.M.A. and C.G.A. type V.D., grade RM specifications.

Adjustable Hose Bumpers						
For Reel Series	Part Number	Hose O.D. in (mm)	Hose O.D. in (mm)			
TW5000 TW7000 TW80000 TWD80000	8-HR1004-3	.530 (13) twin	1/4 twin (6)			
TW80000 TW8000				600521	.680 (17) twin	3/8 twin (10)



**Available Options**

**Mounting Brackets**

**Inlet Hose Assemblies**

**Replacement Hoses**






CEA30006

## Hand Crank / Spring Retractable Cable Welding Reels Series CEA / WC

- Designed to improve safety in the work area with an increase in efficiency and productivity
- Cable reels have a current path through a continuous 400 AMP, 90 V DC (maximum) rated enclosed slip ring
- Welding cable reels store work lead or electrode lead, up to #2/0, safely and effectively when not in use. Each lead requires a separate reel. When welding also refer to ANSI/Asc Z 49.1
- Stores cable when not in use, eliminating tangled, kinked welding cables
- Maintains proper bend radius of cables, providing longer cable life
- Keeps work area and vehicles better organized, resulting in better space utilization

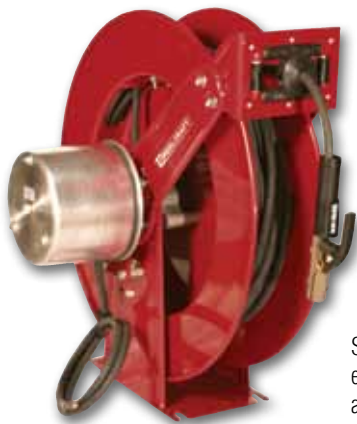

WC80001

Shown with electrode, clamp and cable (not included)



WC7000

### Features - Hand Crank Reels

- ✓ All-bolted heavy gauge steel construction provides long life and ease of use and maintenance.
- ✓ Manual drum lock prevents spool from turning when not in use preventing unwanted pay out of cable.

Dimensions - Size Index				
	1		2	
	in	mm	in	mm
<b>A</b>	20 1/4	514	25 3/8	645
<b>B</b>	19 3/4	502	24	610
<b>C</b>	7 7/8	200	10	254
<b>D</b>	3 7/8	98	6	152
<b>E</b>	13 1/4	337	15 5/8	397

Dimensions - Size Index				
	3		4	
	in	mm	in	mm
<b>A</b>	6	152	12	305
<b>B</b>	9 3/4	248	15 3/4	400
<b>C</b>	11	279	17	432
<b>D</b>	15	381	21	533
<b>E</b>	21	533	27	686

Four 1/2" (12.7 mm) diameter mounting holes.

### Available Options

Mounting Brackets



Replacement Bumpers



### Caution:

If cable reels are to be used for extended periods of time, unwind all cable from reel to prevent heat build-up. For indoor non weather-tight applications only.



Model without cable & bumper	Cable Size								Shipping Weight	Size Index #	
	#2 (31mm <sup>2</sup> )		#1 (39mm <sup>2</sup> )		#1/0 (50mm <sup>2</sup> )		#2/0 (62mm <sup>2</sup> )				
	ft	m	ft	m	ft	m	ft	m			
CEA30006	300	91	250	76	200	61	150	46	46	21	3
CEA30012	500*	152	500*	152	400	122	300	91	54	24	4
WC7000	-----		50	15	50	15	50	15	58	26	1
WC80001	-----		75	23	75	23	75	23	102	46	2
WC80002	-----		100	30	-----		-----		104	47	2

\*May exceed maximum cable length allowable for most welding applications. **NOTE:** Each cable requires separate reel.

# Multiple Configurations | Safe-T-Reel Series

## Hand Crank Reels

Up to 150' fuel gas  
Up to 200' 12/3 cable



Ideal for applications where space, weight and flexibility are key, these reels are designed for manual winding of air/water/fuel gases hose, electric cord and welding cable. Versatile in function, select configurations to suit specific needs. Safe-T-Reels offer trouble-free management of large capacities of hose or cord.



## Dual Spool

Side-by-side combinations

T-2462-0


## Dual Spool

Stacked combinations  
T-2464-0



Model without cable	AMP	Reel Capacity		Cable		Shipping Weight		Size Index #
		ft	m	AWG	Cond	lbs	kg	
<b>Single Welding Cable 600 V, 2/0 Cable</b>								
T-1460-0	250	200	61	-----		32	15	2
<b>Single Power Cable - 3 Conductor</b>								
T-1535-003	30	150	45	8	3	18.5	5	1
T-1535-083-100*	33	100	30	8	3	50	23	1
T-1535-103-200*	24	200	61	10	3	81	37	1
T-1535-123-100*	25	100	30	12	3	46	21	1
T-1535-123-200*	20	200	61	12	3	71	32	1

\*Includes cable.

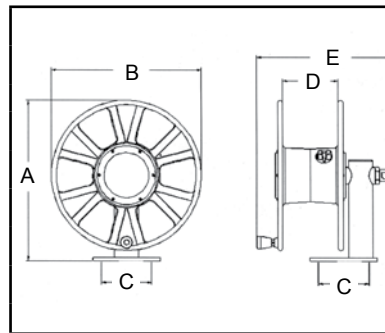

Dimensions - Size Index						
	1		2		3	
	in	mm	in	mm	in	mm
<b>A</b>	19	483	19	483	19	483
<b>B</b>	18	457	18	457	18	457
<b>C</b>	6	152	6	152	6	152
<b>D</b>	6 1/2	165	6 1/2	165	12 1/2	165
<b>E</b>	15 3/4	401	16 1/4	412	21 3/4	552

Four 1/2" (12.7 mm) diameter mounting holes.

Model without hose	Hose I.D.		Hose O.D.		Reel Capacity		Pressure		Shipping Weight		Size Index #
	in	mm	in	mm	ft	m	psi	bar	lbs	kg	
<b>Single Spool Air / Water Hose Reels</b> Maximum Temperature 150 °F (65 °C)											
T-1115-08	1/2	13	.844	21	150	46	300	21	18	8	1
T-1116-08	1/2	13	.844	21	250	76	300	21	22	10	3
T-1117-12	3/4	19	1.188	30	50	15	250	17	18	8	1
T-1118-12	3/4	19	1.188	30	75	23	250	17	22	10	3
<b>Single Spool Oxygen/Acetylene T-Grade Seals</b> Maximum Temperature 150 °F (65 °C)											
T-1225-04 CA	1/4	6	.530	13	150	45	200	14	19	9	2
T-1225-04-100T*	1/4	6	.530	13	100	30	200	14	44	20	2
T-1226-06	3/8	10	.625	16	100	30	200	14	19	9	2

\*Includes hose.

## Single Spool



T-1225-04-100T

### Detail of heavy duty shaft

with tapered roller bearing for high rigidity



Shaft sizes are 1" to 1.25" in diameter, supported by tapered roller bearings with 2" to 2.3" housings.

Model without cable	AMP	Reel Capacity		Shipping Weight		Size Index #
		ft	m	lbs	kg	
<b>Dual Side-by-Side Welding Cable (2) 600 V, 2/0 Cable</b>						
T-2462-0	250	200	61	51	23	5
<b>Dual Stacked Welding Cable (2) 600 V, 2/0 Cable</b>						
T-2464-0	250	200	61	62	28	4
<b>Dual Side-by-Side Power Cable / Air Hose</b>						
T-2735-2-0*	35	200	61	150	45	5

\*Air hose side has 1/2" (12.7 mm) inlet.

Dimensions - Size Index					
	4			5	
	in	mm		in	mm
<b>A</b>	38	965	19	483	
<b>B</b>	18	457	18	457	
<b>C</b>	6	152	6	152	
<b>D</b>	6 1/2	165	6 1/2	165	
<b>E</b>	16 1/4	737	29	737	

Four 1/2" (12.7 mm) diameter mounting holes.

**Caution:** Compressed air hoses should not be converted to oxygen service. Compressed air hoses are often contaminated with an oil coating, which can react explosively when oxygen is introduced. Oxygen/Acetylene cannot be combined with welding cable or power cord. **Note:** Models listed are without hose and/or cable except where listed. Weights listed above are actual product weight without packaging materials. Safe-T-Reels are available with cable or hose and in various combinations. Please consult Reelcraft customer service for additional information.






**Medium Duty Spring Retractable Reels  
 Series RT**

Made in USA 



RT650-OLP  
 Patent No. 7,150,425

Series RT is an economical choice for a medium duty, lighter weight, spring-driven hose reel for applications that are less demanding, yet require a product that can withstand industrial and commercial use. The industrial-grade drive spring is protected from the environment in a polypropylene spool for longer service life. Guide arm adjusts to seven positions.

Model with Hose	Shipping Weight		Pressure		Hose I.D.		Hose O.D.		(M)NPTF Outlet	(F)NPTF Inlet	Hose Length		Length		Width		Height	
	lbs	kg	psi	bar	in	mm	in	mm	in	in	ft	m	in	mm	in	mm	in	mm
<b>Low Pressure Air/Water Reels</b> Maximum Temperature 150° F (65° C)																		
 RT450-OLP	24	11	300	21	1/4	6	.475	12	1/4	3/8	50	15	16 1/2	419	5 3/4	146	17 7/8	454
 RT635-OLP	21	10	300	21	3/8	10	.600	15	1/4	3/8	35	11	16 1/2	419	5 3/4	146	17 7/8	454
 RT650-OLP	27	12	300	21	3/8	10	.600	15	1/4	1/2	50	15	16 1/2	419	6 1/4	159	17 7/8	454
 RT835-OLP	27	12	300	21	1/2	13	.750	19	1/2	1/2	35	11	16 1/2	419	6 1/4	159	17 7/8	454
 RT850-OLP	37	17	300	21	1/2	13	.750	19	1/2	1/2	50	15	16 1/2	419	7 3/4	197	17 7/8	454

Hose included. Additional models available as standard, contact manufacturer or go to [www.reelcraft.com](http://www.reelcraft.com) for master catalog listing.







**Premium Duty Spring Retractable Reels  
 Series 4000, 5000 & 5005**

Made in USA 



A5850 OLP

Series 4000, 5000 and 5005 reels are all-steel construction and compact for a wide range of applications with critical space requirements. A full flow shaft and swivel assures maximum product delivery. Guide arm adjusts to two positions. The standard low pressure hose is for air or water service only.

Model with Hose	Shipping Weight		Pressure		Hose I.D.		Hose O.D.		(M)NPTF Outlet	(F)NPTF Inlet	Hose Length		Length		Width		Height	
	lbs	kg	psi	bar	in	mm	in	mm	in	in	ft	m	in	mm	in	mm	in	mm
<b>Low Pressure Air/Water Reels</b> Maximum Temperature 150° F (65° C)																		
 4425 OLP	19	9	300	21	1/4	6	.475	12	1/4	3/8	25	8	12 3/8	314	5 5/8	143	12 7/8	327
 5450 OLP	26	12	300	21	1/4	6	.475	12	1/4	3/8	50	15	14	356	6 1/8	156	14 3/8	365
 4625 OLP	20	9	300	21	3/8	10	.600	15	1/4	3/8	25	8	12 3/8	314	5 5/8	143	12 7/8	327
 5650 OLP	25	11	300	21	3/8	10	.600	15	1/4	3/8	50	15	16 1/2	419	5 7/8	149	17 5/8	448
 A5825 OLP	27	12	300	21	1/2	13	.750	19	1/2	3/8	25	8	14	356	6 1/8	156	14 3/8	365
 A5850 OLP	41	19	300	21	1/2	13	.750	19	1/2	3/8	50	15	16 1/2	419	7 1/4	184	17 5/8	448

Hose included. Additional models available as standard, contact manufacturer or go to [www.reelcraft.com](http://www.reelcraft.com) for master catalog listing.





**Heavy Duty Industrial Spring Retractable Reels  
 Series 7000**

Made in USA 



7850 OLP

Series 7000 is ideal for the most demanding applications. The reel's base and guide arms are formed from high-grade steel and engineered with structural forms and gussets to yield the greatest amount of strength. The Series 7000 incorporates an all steel construction and a baked-on powder coat finish to produce a rugged corrosion resistant product suitable for a wide variety of heavy duty applications.

Model with Hose	Shipping Weight		Pressure		Hose I.D.		Hose O.D.		(M)NPTF Outlet	(F)NPTF Inlet	Hose Length		Length		Width		Height	
	lbs	kg	psi	bar	in	mm	in	mm	in	in	ft	m	in	mm	in	mm	in	mm
<b>Low Pressure Air/Water Reels</b> Maximum Temperature 150° F (65° C)																		
 7650 OLP	43	20	300	21	3/8	10	.600	15	1/4	1/2	50	15	19 3/4	502	7	178	20 1/4	514
 7670 OLP	47	21	300	21	3/8	10	.600	15	1/4	1/2	70	22	19 3/4	502	7	178	20 1/4	514
 7850 OLP	47	21	300	21	1/2	13	.750	19	3/8	1/2	50	15	19 3/4	502	7	178	20 1/4	514
 7925 OLP	47	21	250	17	3/4	19	1.075	27	3/8	3/4	25	8	19 3/4	502	7	178	20 1/4	514

Hose included. Additional models available as standard, contact manufacturer or go to [www.reelcraft.com](http://www.reelcraft.com) for master catalog listing.



# Heavy Duty Cord Reels | Series 30000

## Heavy Duty Hand Crank Reels Series 30000



CA33112 L



Reelcraft's series 30000 reels are designed for rugged, heavy duty applications requiring long lengths of hose and large storage capacity. All-bolted unitized construction with no welds to fatigue. Full flow shaft and ball bearing swivel (excludes 1/2" models) and heavy gauge steel frame, spool and drum ensure longest service life.

Model without Hose	Shipping Weight		Pressure		Hose I.D.		Hose O.D.		(F)NPTF Reel Outlet	(F)NPTF Reel Inlet	Hose Length		Length		Width		Height	
	lbs	kg	psi	bar	in	mm	in	mm	in	in	ft	m	in	mm	in	mm	in	mm
CA32106 L	40	18	1000	69	1/2	13	.844	21	1/2	1/2	100	30	17 <sup>3</sup> / <sub>4</sub>	451	19 <sup>3</sup> / <sub>4</sub>	502	20 <sup>1</sup> / <sub>4</sub>	514
CA32112 L	46	21	1000	69	1/2	13	.844	21	1/2	1/2	200	61	17 <sup>3</sup> / <sub>4</sub>	451	25 <sup>3</sup> / <sub>4</sub>	654	20 <sup>1</sup> / <sub>4</sub>	514
CA33106 L	41	19	1000	69	3/4	19	1.118	28	3/4	3/4	50	15	17 <sup>3</sup> / <sub>4</sub>	451	19 <sup>3</sup> / <sub>4</sub>	502	20 <sup>1</sup> / <sub>4</sub>	514
CA33112 L	46	21	1000	69	3/4	19	1.118	28	3/4	3/4	100	30	17 <sup>3</sup> / <sub>4</sub>	451	25 <sup>3</sup> / <sub>4</sub>	654	20 <sup>1</sup> / <sub>4</sub>	514
CA33118 L	51	23	1000	69	3/4	19	1.118	28	3/4	3/4	175	53	17 <sup>3</sup> / <sub>4</sub>	451	31 <sup>3</sup> / <sub>4</sub>	806	20 <sup>1</sup> / <sub>4</sub>	514
CA32112 M	46	21	3000	207	1/2	13	.844	21	1/2	1/2	200	61	17 <sup>3</sup> / <sub>4</sub>	451	25 <sup>3</sup> / <sub>4</sub>	654	20 <sup>1</sup> / <sub>4</sub>	514
CH37118 L	54	24	300	21	1	25	1.375	35	1	1	100	30	17 <sup>3</sup> / <sub>4</sub>	451	31 <sup>3</sup> / <sub>4</sub>	806	20 <sup>1</sup> / <sub>4</sub>	514

Hose not included. Additional models available as standard, contact manufacturer or go to [www.reelcraft.com](http://www.reelcraft.com) for master catalog listing.

## Power Cord & Light Reels Series 4000 & 5000



Series 4000 & 5000 power cord and light reels offer many different styles of outlets and lamps. Easy to mount and structurally strong, the power cord and light reels have robotically welded heavy gauge steel frame that attaches to most structurally sound surfaces. Multiple guide arm positions allows for versatile uses and easier field adjustment.



Model	Accessory	Cord Specifications						VOLTS	AMPS	Shipping Weight	
		ft	m	# COND	AWG	mm <sup>2</sup>	TYPE			lbs	kg
L 4545 123 3	Single Receptacle	45	14	3	12	3.32	SJEOOW	125	15	27	12
L 5550 123 3	Single Receptacle	50	15	3	12	3.32	SJEOOW	125	15	44	20
L 4545 123 3A	Single Connector	45	14	3	12	3.32	SJEOOW	125	20	28	13
L 4545 123 9G	Triple Tap w/GFCI(F)	45	14	3	12	3.32	SJEOOW	125	15	29	13
L 4050 163 1	Incandescent Light	50	15	3	16	1.33	SJTOW	125	13	27	12
L 4035 163 8	Fluorescent Light & Outlet	35	11	3	16	1.33	SJTO	125	10	25	11
L 4050 163 10	LED	50	15	3	16	1.33	SJTOW	125	13	28	13

Incandescent bulb 75 watt maximum. For indoor use only. All models UL listed at 125 Volt 60 HZ single phase. Base power cord reels without cord ends are suitable for 220V. \*Inlet plug is NEMA5-15P configuration.

DIMENSIONS	
L4000 Models	
<b>LENGTH:</b>	12 <sup>5</sup> / <sub>8</sub> " 321mm
<b>WIDTH:</b>	9 <sup>3</sup> / <sub>8</sub> " 239mm
<b>HEIGHT:</b>	13 <sup>1</sup> / <sub>4</sub> " 337mm
L5000 Models	
<b>LENGTH:</b>	16 <sup>1</sup> / <sub>2</sub> " 419mm
<b>WIDTH:</b>	10 <sup>1</sup> / <sub>2</sub> " 267mm
<b>HEIGHT:</b>	17 <sup>1</sup> / <sub>2</sub> " 445mm

### Inlet Hose Assemblies

Part Number	Length		Weight	
	ft	m	lbs	kg
<b>'T' Grade Twin Welding</b>				
*S601031-2	2	.610	.70	.317
*S601031-4	4	1.219	1.12	.508
*S601031-6	6	1.829	1.90	.861

\*For Reel Series TW5000 T and TW7000 T only. Hose ID = 1/4", NPFT (M) Fittings = Female both ends, Working Pressure = 200 PSI/14 bar. A flexible hose connection must be used between the hose reel inlet and the source of supply to prevent possible misalignment and binding or warranty is void. Other sizes available as well.

### Additional Accessories

Wall-Mounted Universal Swing Bracket	
Bracket will pivot approximately 180°. All steel construction with a durable baked on powder coat finish. Weight 6 lbs (3kg). <b>Note:</b> Not for overhead mounting.	
600626	
For Reel Series	Part #
4000 / 5000 / 7000	600626
80000 / D80000	600980

340° Pivot Base	
Aligns reel to the direction of hose or cord run. May be mounted with reel upright or hanging. Weight 10 lbs. (5kg).	
600801	
For Reel Series	Part #
4000 / 5000 / 7000	600608
80000 / D80000	600801
30012	600801-12

## North America and Corporate Headquarters

2842 E. Business Hwy 30  
Columbia City, IN 46725

**Customer Service Direct Line:** 855-634-9109

Ph: 800-444-3134 • Fax: 800-444-4587

Ph: 260-248-8188 • Fax: 260-248-2605

reelcraft@reelcraft.com

**www.reelcraft.com**

## Latin America and the Middle East

Thompson International, Inc.

P.O. Box 12958, Ft. Wayne, IN 46866

Ph: 260-489-1685 • Fax: 260-489-0203

info@t-i-i.com

**www.reelcraft.com/latinamerica**

## China

Reelcraft Changzhou Co., Ltd.

Building C, No. 229 HeHai West Road

Changzhou, Jiangsu, China 213022

Ph: +86 (519) 8512 2391 ext. 8002

Fax: +86 (519) 8512 9309

rco@reelcraftchina.com

**www.reelcraftchina.com**

## Europe

Unit 17 • Cronin Courtyard

Weldon South Industrial Estate

Corby • Northamptonshire NN18 8AG United Kingdom

Ph: +44 (0) 1536 406999

Fax: +44 (0) 1536 406777

europa@reelcraft.com

**www.reelcraft.com/europe**

## Pacific Rim

P.O. Box 53776, Clark Freeport Zone

Philippines 2023

Ph: +63 (45) 625-6624

Fax: +63 (45) 321-0643

rap@comclark.com

**www.reelcraft.com/asia**

## Australia

PO Box 6463 BC, Blacktown

NSW 2148, Australia

Ph: +61 (2) 9621 8988

Fax: +61 (2) 9621 7688

sales@recoila.com

**www.reelcraft.com**