

Reeltek Reels



reelcraft.com

McGUIRE AIR COMPRESSORS www.hosereels.biz

 **REELCRAFT**®

1-888-229-9999

Lighterweight, Economical Reels | Series RT

ReelTek is ideal for...

- Light industrial
- Air-powered tools
- Assembly lines
- Machine shops
- Maintenance shops
- Auto / truck repair
- Auto paint & body
- Farm & ranch
- Woodworking
- Garden shops
- Home workshops
- Many more uses

Rely on ReelTek for convenience, versatility and value. Keep hoses organized, save time, improve safety, efficiency and extend hose life. ReelTek is available with or without hose, has a long swivel life and attaches to most surfaces that can be drilled. Rely on ReelTek to reduce tangled hoses and improve hose logistics.

Kinkless Hose

High quality, industrial-grade kinkless hose is specially blended for use on reels.

Long-Lasting Latch Spring

A stainless steel torsion spring is used on the latch to insure maximum life.

Corrosion Resistance

Steel components are individually powder coated and combined with composite materials, which virtually eliminates corrosion.

Long Swivel Life

Our precision, field-proven swivel assures long service life.

Hose Retracts Every Time

ReelTek's latch mechanism is mounted on the arm to insure hose extends and retracts every time.

Easy Maintenance

The glass-filled composite spool and spring case contains the industrial-grade drive-spring. The spring is protected from the environment for longer life.

Versatile Mounting


The guide arm can be adjusted to any of seven convenient locations.

Structural Strength

The base and guide arm are made of heavy gauge steel stampings, with re-reinforced ribs to increase structural strength. Main shaft is 1" outside diameter (O.D.), cold-rolled steel.

Easy to Mount

The base has two slotted holes for easy mounting and adjustment.

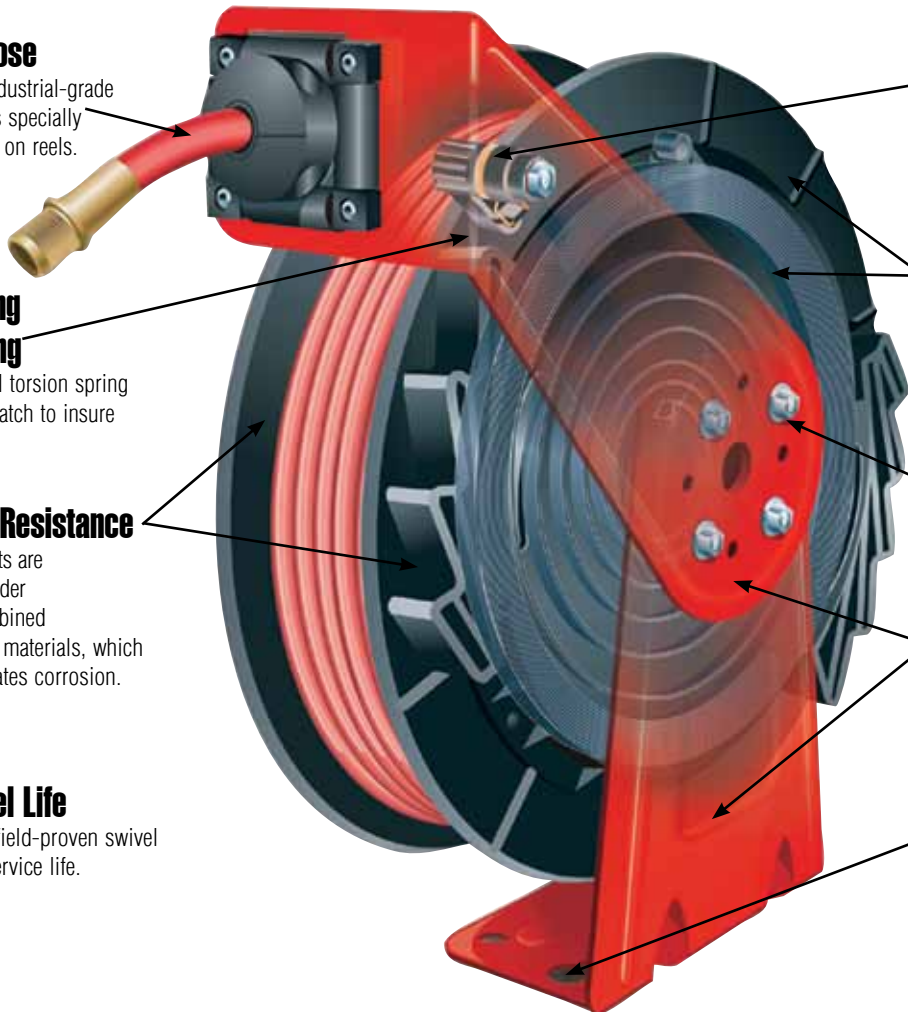

Add a little color to your order.

Reeltek is now available in yellow, black or blue. Call to place your order today.



RT625-OLP-YW42



RT650-OLP-BK35



RT625-OLP-BL40

Lighterweight, Economical Reels | Series RT




Made in USA

RT650-OLP
Patent No. 7,150,425

Medium Duty Spring Retractable Reels Air/Water/Oil/Grease - 1/4", 3/8", 1/2" I.D.

Series RT is an economical choice for a medium duty, lighter weight, spring-driven hose reel for applications that are less demanding, yet require a product that can withstand industrial and commercial use. The industrial-grade drive spring is protected from the environment in a polypropylene spool for longer service life. Guide arm adjusts to seven positions.

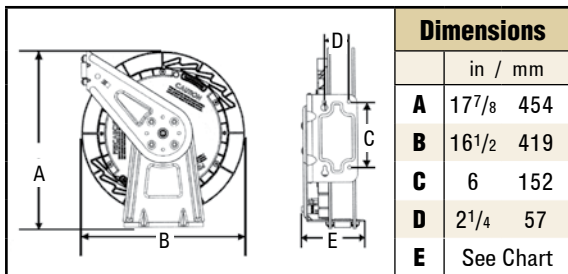

NEW!
Nitrogen Reels

RT650-OLPG-GN20



NEW!

Side-Mount Reels
RT650-OLPSM

Model with Hose	Shipping Weight		Pressure		Hose I.D.		Hose O.D.		(M)NPTF Outlet	(F)NPTF Inlet	Hose Length		Model without hose & bumper	Shipping Weight		Pressure		E
	lbs / kg	psi / bar	in / mm	in / mm	in	in	ft / m	lbs / kg	psi / bar	in / mm								
Low Pressure Air/Water Reels Maximum Temperature 150° F (65° C)																		
RT425-OLP	19 9	300 21	1/4 6	.475 12	1/4	3/8	25 8	RT402-OLP	19 9	300 21	5 ³ / ₄ 146							
RT435-OLP	21 10	300 21	1/4 6	.475 12	1/4	3/8	35 11	RT403-OLP	19 9	300 21	5 ³ / ₄ 146							
RT450-OLP	24 11	300 21	1/4 6	.475 12	1/4	3/8	50 15	RT405-OLP	21 10	300 21	5 ³ / ₄ 146							
RT465-OLP	25 11	300 21	1/4 6	.475 12	1/4	3/8	65 20	-----	---	---	---							
RT625-OLP	20 9	300 21	3/8 10	.600 15	1/4	3/8	25 8	RT602-OLP	19 9	300 21	5 ³ / ₄ 146							
RT635-OLP	21 10	300 21	3/8 10	.600 15	1/4	3/8	35 11	RT603-OLP	19 9	300 21	5 ³ / ₄ 146							
RT650-OLP	27 12	300 21	3/8 10	.600 15	1/4	1/2	50 15	RT605-OLP	22 10	300 21	6 ¹ / ₄ 159							
RT825-OLP	26 12	300 21	1/2 13	.750 19	1/2	1/2	25 8	RT802-OLP	23 10	300 21	6 ¹ / ₄ 159							
RT835-OLP	27 12	300 21	1/2 13	.750 19	1/2	1/2	35 11	RT803-OLP	23 10	300 21	6 ¹ / ₄ 159							
RT850-OLP	37 17	300 21	1/2 13	.750 19	1/2	1/2	50 15	RT805-OLP	25 11	300 21	7 ³ / ₄ 197							
Medium Pressure Oil Reels Maximum Temperature 150° F (65° C)																		
RT625-OMP	27 12	1000 69	3/8 10	.710 18	3/8	3/8	25 8	RT602-OMP	22 10	1000 69	5 ³ / ₄ 146							
RT635-OMP	30 14	1000 69	3/8 10	.710 18	3/8	3/8	35 11	RT603-OMP	22 10	1000 69	5 ³ / ₄ 146							
RT650-OMP	35 16	1000 69	3/8 10	.710 18	3/8	1/2	50 15	RT605-OMP	25 11	1000 69	7 ³ / ₄ 197							
RT825-OMP	31 14	1000 69	1/2 13	.850 22	1/2	3/8	25 8	RT802-OMP	23 10	1000 69	6 ¹ / ₄ 159							
RT835-OMP	32 15	1000 69	1/2 13	.850 22	1/2	1/2	35 11	RT803-OMP	23 10	1000 69	6 ¹ / ₄ 159							
High Pressure Grease Reels Maximum Temperature 150° F (65° C)																		
RT425-OHP	28 13	5000 345	1/4 6	.580 15	1/4	3/8	25 8	RT402-OHP	22 10	5000 345	5 ³ / ₄ 146							
RT435-OHP	30 14	5000 345	1/4 6	.580 15	1/4	3/8	35 11	RT403-OHP	22 10	5000 345	5 ³ / ₄ 146							
RT625-OHP	30 14	4000 276	3/8 10	.730 19	3/8	3/8	25 8	RT602-OHP	22 10	5000 345	5 ³ / ₄ 146							
RT635-OHP	34 15	4000 276	3/8 10	.730 19	3/8	1/2	35 11	RT603-OHP	22 10	5000 345	6 ¹ / ₄ 159							
RT650-OHP	46 21	4000 276	3/8 10	.730 19	3/8	1/2	50 15	RT605-OHP	25 11	5000 345	7 ³ / ₄ 197							

Low pressure reels furnished standard with PVC hose. Medium pressure reels furnished standard with S.A.E. 100 R1T one wire braid hose. High pressure reels furnished standard with S.A.E. 100 R2T two wire braid hose, suitable for grease applications only.

Available Options

Mounting Brackets



Inlet Hose Assemblies



Replacement Bumpers



Replacement Hoses



North America and Corporate Headquarters

2842 E. Business Hwy 30
Columbia City, IN 46725
Ph: 800-444-3134 • Fax: 800-444-4587
Ph: 260-248-8188 • Fax: 260-248-2605
reelcraft@reelcraft.com
www.reelcraft.com

Latin America and the Middle East

Thompson International, Inc.
P.O. Box 12958, Ft. Wayne, IN 46866
Ph: 260-489-1685 • Fax: 260-489-0203
info@t-i-i.com
www.reelcraft.com/latinamerica

China

Reelcraft Changzhou Co., Ltd.
Building C, No. 229 HeHai West Road
Changzhou, Jiangsu, China 213022
Ph: +86 (519) 8512 2391 ext. 8002
Fax: +86 (519) 8512 9309
rco@reelcraftchina.com
www.reelcraft.com/china

Europe

Unit 17 • Cronin Courtyard
Weldon South Industrial Estate
Corby • Northamptonshire NN18 8AG
United Kingdom
Ph: +44 (0) 1536 406999
Fax: +44 (0) 1536 406777
europe@reelcraft.com
www.reelcraft.com/europe

Pacific Rim

P.O. Box 53776, Clark Freeport Zone
Philippines 2023
Ph: +63 (45) 625-6624
Fax: +63 (45) 321-0643
rap@comclark.com
www.reelcraft.com/asia

Australia

PO Box 6463 BC, Blacktown
NSW 2148, Australia
Ph: +61 (2) 9621 8988
Fax: +61 (2) 9621 7688
sales@recoila.com
www.reelcraft.com