

# Urea Reel

## Series UR7000

# New Product Announcement

### DESCRIPTION

Reelcraft introduces UR7000 Series spring retractable hose reels. Designed to aide in the servicing/dispensing of urea on-board systems for late model diesel engines, these reels are an integral part in urea dispensing equipment found in truck stops, service stations and garages. Dispensing equipment is going to become more prevalent across the United States as the deadline for the federal emissions standard mandate of 2010 approaches. Reelcraft is offering a solution. The reel itself incorporates an all stainless steel fluid path and Viton® o-rings for the dispensing of this aqueous ammonia fluid.

### BENEFITS

- **Corrosion Resistance** Steel reels are individually powder coat painted prior to assembly for maximum corrosion resistance. Stainless models are nearly impervious to weathering.
- **Heavy Duty** Steel stampings are engineered with structural forms to give added strength and rigidity.
- **Ease of Maintenance** Open design allows for access to any wear items, guide arm and bumper stop are adjustable using only standard tools.
- **Extended Hose Life** Reel stores expensive hose up and out of harm's way greatly extending the service life of hose.


### RELATED PRODUCTS

Reelcraft offers a complete line of over 2,500 hose, cord and cable reels. For more information visit us on the web at [www.reelcraft.com](http://www.reelcraft.com).



model shown: UR7925 OLB

UREA REEL / SERIES UR70000

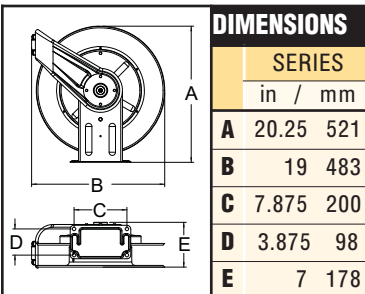

### SPECIFICATIONS

- ✓ Designed for dispensing AUS32, Aqueous Urea Solution
- ✓ Goodyear DEF Dispensing Hose and adjustable bumper included
- ✓ Gasketed spring case
- ✓ Viton® o-rings
- ✓ 316 Stainless shaft and Super Swivel®
- ✓ Reels constructed from industrial grade carbon steel or 304L stainless steel.
- ✓ High quality stainless steel hose ferrules

MODELS WITH HOSE			HOSE CAPACITY						MODELS WITHOUT HOSE		
MODEL (with hose)	WEIGHT	PRESSURE	I.D.	O.D.	(M)NPTF OUTLET	(F)NPTF INLET	LENGTH	MODEL (without hose)	WEIGHT	PRESSURE	
	lbs / kg	psi / bar							in / mm	in / mm	in
<b>CARBON STEEL REELS</b>											
UR7915 OLB	48 22	300 21	3/4 19	1.13 29	3/4	3/4	15 5	UR7900 OLB	44 20	500 35	
UR7925 OLB	53 24	300 21	3/4 19	1.13 29	3/4	3/4	25 8	UR7900 OLB	44 20	500 35	
<b>STAINLESS STEEL REELS</b>											
UR7915 OLS	52 24	300 21	3/4 19	1.13 29	3/4	3/4	15 5	UR7900 OLS	44 20	500 35	
UR7925 OLS	56 25	300 21	3/4 19	1.13 29	3/4	3/4	25 8	UR7900 OLS	44 20	500 35	

NOTE: Models available with BPSPT inlet/outlet thread, consult factory. Working temperature range: -15°F (-26°C) to 250°F (121°C)

North America: 800-444-3134  
 Europe: +44 (0) 1536 406999  
 Pacific Rim: +63 (45) 625-6624  
 China: (519) 8512 2391  
 Latin America: 002-60-489-1685

**Reelcraft Industries, Inc.**  
 2842 E. Business Highway 30  
 Columbia City, IN 46725  
 FAX: 260-248-2605  
[www.reelcraft.com](http://www.reelcraft.com)

Reelcraft Industries is  
**ISO 9001:2000**  
 Certified Since 1996

